

## KP94 SERIES KP94P MINIATURE LINEAR POSITION SENSOR



The KP94 Series of KP94P Miniature Linear Position Sensors are designed to withstand the harsh environments within motorsport and automotive testing applications. By using a proven conductive plastic, track technology and multi-fingered contacts, the KP94P offers high performance and reliability under extreme temperature and vibration.

With standard measurement ranges from 12.5mm to 175mm, the Stainless Steel Shaft is fitted with IP67 rated seals which helps protect against the harshest conditions. With regards to operational temperature range, the KP94P offers high performance and reliability at temperatures up to +150°C. Alternatively, it is capable of operational excellence in cold environments down to -40°C.

A Carbon Sleeve option is also available to protect the shaft against debris and other damage. Industry Standard mounting of Quick-Release Pop Joints, with a cable exit option of either Forwards or Backwards allows for easy integration into existing or new applications.

### TECHNICAL SPECIFICATIONS

<b>Ranges (Zero mm to:)</b>	12.5, 25, 50, 75, 100, 125, 150, 175
<b>Resolution</b>	Essentially Infinite
<b>Repeatability</b>	≤0.01mm
<b>Operational Speed</b>	10m/s Maximum
<b>Mechanical Life</b>	>25 Million Cycles
<b>Supply</b>	5V Typical (40Vdc Maximum)
<b>Wiper Current</b>	<10µA
<b>Linearity</b>	≤0.5%
<b>Electrical Connection</b>	50cm 26AWG, 55Spec + FDR Sleeve
<b>Track Technology</b>	Conductive Plastic
<b>Operating Temperature Range</b>	-40°C to +150°C
<b>Construction</b>	Aluminium Housing and Stainless Steel Shaft
<b>Protection Class</b>	IP67
<b>Options</b>	Please see our separate KP Series Accessories Datasheet

KA Sensors adopts a continuous development program which sometimes necessitates specification changes without notice.

Sense  
Analyse  
Control

#### Features

- 9.4mm Ø Body
- IP67 Standard Sealed
- Pop Joint Mounting
- 12.5mm to 175mm
- ±0.5% Linearity
- Long Life

#### Applications

- Damper Position
- Throttle Pedal
- Aero Surface
- Actuators

bf1systems.com

sales@kasensors.com

KP94P  
KA032D-DS (rev2)

## PART NUMBER CONFIGURATOR


	<b>KP94P</b>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>	-	<input type="text"/>
<b>Range (Stroke)</b>	12.5 mm		012						
	25 mm		025						
	50 mm		050						
	75 mm		075						
	100 mm		100						
	125 mm		125						
	150 mm		150						
	175 mm		175						
<b>Cable Exit</b>	Forward				F				
	Reverse				R				
<b>Flange Mount</b>	No						0		
	Yes - Not with Carbon Fibre Sleeve Option						1		
<b>Special Code</b>	None								000
	Carbon Fibre Sleeve								159

*Sense*  
*Analyse*  
*Control*

### Services for:

- Data Logging
- Telemetry
- Controls
- Wiring

## MECHANICAL DETAILS

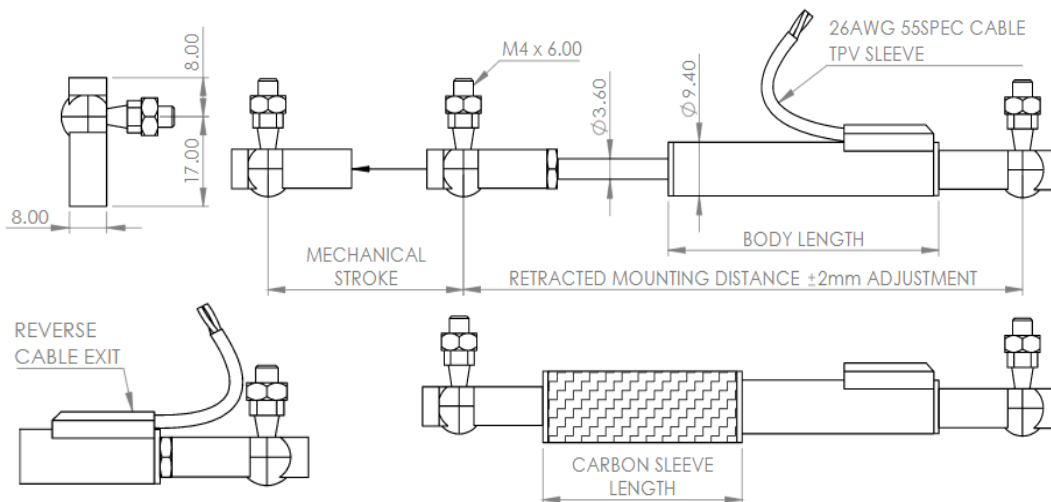

### Contact us

KA Sensors Ltd  
Unit 13, Priest Court  
Springfield Business Park  
Grantham  
United Kingdom  
NG31 7FZ

<b>Active Electrical Stroke (mm)</b>	12.5	25	50	75	100	125	150	175
<b>Retracted Mounting Distance (mm)</b>	98	110	135	160	191	216	241	266
<b>Mechanical Stroke (mm)</b>	14.5	27	52	77	102	127	152	177
<b>Body Length (mm)</b>	53	66	91	116	147	172	197	222
<b>Weight Without Cable (g)</b>	19	21	25	29	33	37	41	45
<b>Resistance (KOhms±20%)</b>	0.8	1.7	3.4	5	6.7	8.4	10	11.7
<b>Carbon Sleeve Length (mm)</b>	24.5	37	62	87	112	137	162	187

## CONNECTION DETAILS

<b>+Ve Supply</b>	<b>0V Supply</b>	<b>Signal</b>
Red	Black	Yellow

Output signal may be reversed by swapping connections to the Red and Black wires.  
**DO NOT** connect +Ve Supply to the Yellow wire as this will cause damage to the sensor element.

ENGINEERING LED | CONFIDENTIAL | EXPERIENCED | RESPONSIVE | DYNAMIC | FRIENDLY

bf1systems.com  
sales@kasensors.com

KP94P  
KA032D-DS (rev2)